


CNT-90XL

Pulsed RF Microwave Counter/Analyzer

- Pulsed RF measurements down to 30 ns
- Frequency, Power, CW or Burst to 27, 40, 46 or 60 GHz
- Speed: 250k measurements/s to internal memory
- Resolution: 14 digits display
- Statistical analysis including histogram, trend & modulation domain display
- Unique ease-of-use: Multiparameter display & graphical presentation of results
- USB & GPIB as standard
- 2 instruments in one - Microwave Counter/Analyzer & 400 MHz general-purpose timer/counter

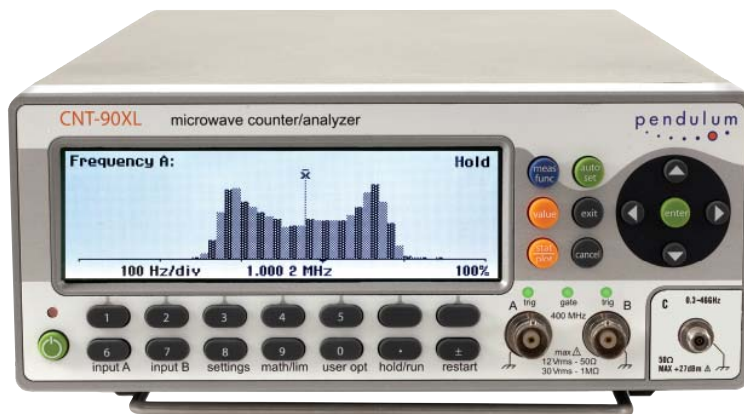

The Pendulum CNT-90XL Microwave Counter/Analyzer is an excellent tool for measurement, analysis and calibration of Microwave Frequency, Power, and Pulsed RF time parameters like pulse width and PRI. Whether in test systems, on the R&D bench, in the calibration lab or out in the field, the high-resolution and ultra-fast CNT-90XL is the state-of-the-art Microwave Counter/Analyzer. The NEW option for pulsed RF makes CNT-90XL ideal for radar test and calibration. The CNT-90XL offers a unique ease-of-use with graphical display and improved control over measurement at an affordable price.

The Fastest Microwave Counter

The CNT-90XL Microwave Counter/Analyzer sets a new industry standard for microwave frequency analysis and outperforms any microwave Pulse or CW counter on the market regarding resolution, speed and acquisition time. The CNT-90XL is the worlds fastest Microwave counter and offers a measurement speed up to 250,000 frequency samples/s, for advanced statistical analysis, and for analysis of frequency or power transients.

The NEW Pulsed RF option enables measurements of pulses down to 30 ns width, plus PRI/PRF, frequency in burst and power in burst.

The multi-functional CNT-90XL also serves as a 400 MHz general purpose timer/counter, with unique ease-of-use with analysis capabilities to view variations in signal parameters both numerically and graphically.

Applications and Features

The CNT-90XL is intended for several applications, such as:

- Pulsed, Chirped, and Doppler Radar testing and calibration
- Microwave link carrier calibration
- Satellite communication equipment testing
- RF and microwave instrumentation calibration
- RF components and modules, including YIG and VCO testing
- Medical RF equipment testing

Product Features And Benefits

- Pulsed RF measurements (optional) includes Pulse Width to 30 ns, PRI/PRF, Frequency in Burst, Power in Burst
- Fast high-resolution frequency or power measurements, for modulation, doppler shifts, or transient analysis
- Very short acquisition time of 25 ms (Auto) or zero (Manual)
- High sensitivity (-33 dBm)
- Statistical processing and graphical histogram, trend and modulation display
- Affordable microwave frequency counting

Leading Performance

- High resolution is vital for R&D and production testing. CNT-90XL meets this requirement with 100 ps single shot (time) or 12 digits/s (frequency). Obtained values are displayed with up to 14 digits.
- For calibration purposes, the CNT-90XL offers very high accuracy through stable internal OCXO time base, plus high resolution.
- Both USB and GPIB interfaces are standard. With USB you won't need to invest in a GPIB interface card for your PC. The GPIB operates in either SCPI/GPIB or 53131 emulation mode, for plug-and-play replacement in existing ATE systems.
- Menu-oriented settings reduce the risk of mistakes. Valuable signal information, given in multi-parameter displays, removes the need for other instruments like DVM's and Scopes.

Battery Option

The CNT-90XL has an optional battery pack with 90 Wh capacity, capable of mains-free operation for at least 4.5 hours. In stand-by mode the battery pack can keep an OCXO warm and running for over 24 hours. Battery operation of a frequency counter/analyzer is valuable in three different applications:

- Mains-free operation in the field
- Transportation of high-stability OCXO to maintain stability, which gives instant use at destination without any warm-up time
- Battery backup acting as a built in UPS (Uninterrupted Power Supply)

TimeView®, Modulation Domain Analysis SW

The optional Modulation Domain SW TimeView® is the ultimate tool to view and analyze dynamic frequency changes in real-time, utilizing the high-resolution PC screen, marker read-outs and processing, FFT-calculation to find modulation frequencies, ADEV calculation of short-term stability and more.

Excellent Graphical Presentation

One of the great features of the CNT-90XL is the graphical display and the menu oriented settings. The non-expert can easily make correct settings without risking costly mistakes. The multi-parameter display shows auxiliary measurement values such as Power level in dBm in Frequency measurements.

Measurement values are presented both numerically and graphically. The graphical presentation of results (histograms, trends etc.) gives a much better understanding of the nature of signal jitter. It also provides you with a much better view of changes vs time, from long term trends like slow drift, to fast modulation and transients. Three statistical views of the same data set can be viewed: Numerical, Histogram and Modulation/Trend. It is very easy to capture and toggle between views of the same data.

When adjusting a frequency source to given limits, the Limit qualifying tool gives fast and accurate visual guidance. Tolerance limit markers are visually displayed and the actual frequency is graphically displayed inside or outside the limit markers. Passing the limits will cause an alarm indication.

The graphical display examples below show the frequency changes over time directly on-screen, for example Doppler frequency shift in speed radar sensors, fast power switching, FM or AM. Built-in statistical processing presents numerical stability data and also frequency distribution histograms on-screen for analysis of frequency stability or modulation.

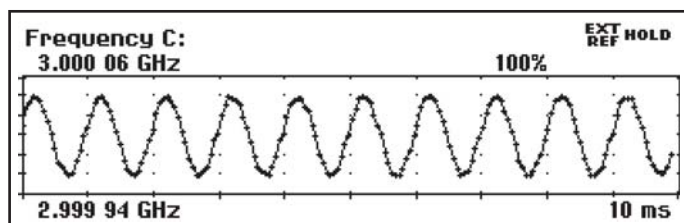


Figure 1: 1kHz FM with 12 ppm modulation depth

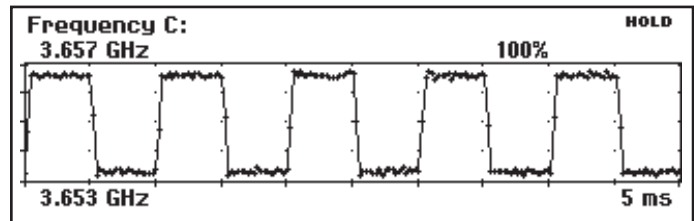


Figure 2: Pulse modulated frequency or FSK

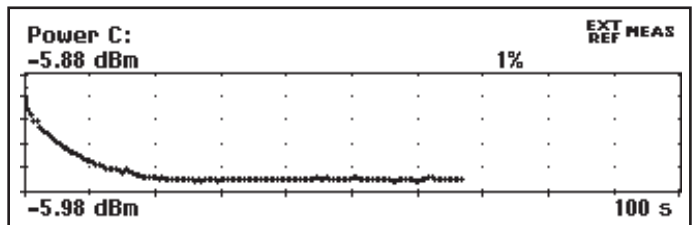


Figure 3: Generator start-up power settling

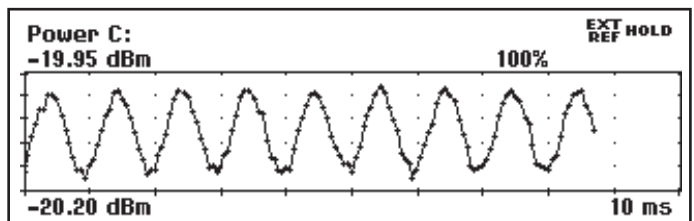


Figure 4: Very small AM on carrier is visualized

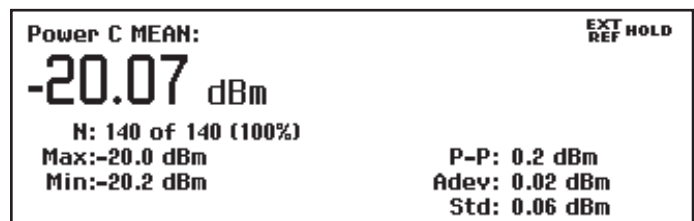


Figure 5: Numeric statistics screen of the previous AM signal

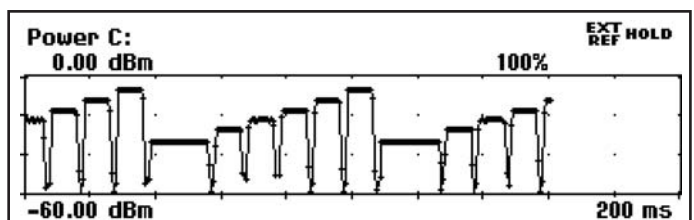


Figure 6: Power step from generator (-30 to -5dBm in 5dBm steps)
NOTE: output is turned off shortly betw. power steps

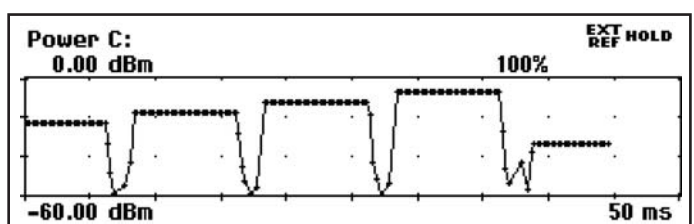


Figure 7: Power step (close up)

Measuring Functions

Frequency A, B, C

Range:

Input A, B: 0.002 Hz to 400 MHz

Input C: 300 MHz to 27, 40, 46 or 60 GHz

Resolution: 12 digits in 1s measuring time

Acquisition C: Auto or Manual

Acquisition time: 25 ms in Auto (typ.)

Aux. Parameters:

Input A, B: Vmax, Vmin, Vp-p

Input C: Power C in dBm or W

Frequency Burst A, B

Range:

Input A, B: 0.002 Hz to 400 MHz

Input C: Requires option 28 - see "Pulsed RF" specs

Minimum Burst Duration: Down to 40 ns

Minimum Pulses in Burst:

Input A or B: 3 (6 above 160 MHz)

PRF Range: 0.5 Hz to 1 MHz

Start Delay: 10 ns to 2sec., 10 ns resolution

Aux. Parameter: PRF

Period A, B (single or average), C (average)

Mode: Single, Average

Range:

Input A, B: 2.5 ns to 1000 s

Input C: 3.3 ns down to 37, 25, 22 or 17 ps

Resolution: 100 ps (single); 12 digits/s (avg)

Acquisition C: Auto or Manual

Acquisition time: 25 ms in Auto (typ.)

Aux. Parameters:

See Freq. A, B, or C measurements

Ratio A/B, B/A, C/A, C/B

Range: (10^9) to 10^{11}

Input Frequency:

Input A, B: 0.1 Hz to 300 MHz

Input C: 300 MHz to 27, 40, 46 or 60 GHz

Aux Parameters: Freq 1, Freq 2

Time Interval A to B, B to A, A to A, B to B

Range:

Normal Calculation: Ons to $+10^6$ sec.

Smart Calculation: -10^6 sec. to $+10^6$ sec.

Resolution: 100 ps

Min. Pulse Width: 1.6 ns

Smart Calculation: Smart Time Interval to determine sign (A before B or A after B)

Positive and Negative Pulse Width A, B

Range: 2.3 ns to 10^6 sec.

Min. Pulse Width: 2.3 ns

Aux. Parameters: Vmax, Vmin, Vp-p

Rise and Fall Time A, B

Range: 1.5 ns to 10^6 sec.

Trigger Levels: 10% and 90% of signal Vp-p

Min. Pulse Width: 1.6 ns

Aux. Parameters: Slew rate, Vmax, Vmin

Positive and Negative Duty Factor A, B

Range: 0.000001 to 0.999999

Freq. Range: 0.1 Hz to 300 MHz

Aux. parameters: Period, pulse width

Phase A Relative B, B Relative A

Range: -180° to $+360^\circ$

Resolution: Single-cycle: 0.001° to 10 kHz, decreasing to 1° >10 MHz. Resolution can be improved via averaging (statistics)

Freq. Range: up to 160 MHz

Aux. Parameters: Freq (A), Va/Vb (in dB)

Vmax, Vmin, Vp-p A, B

Range: -50 V to +50 V, -5V to +5V

Range is limited by the specification for max input voltage without damage (see input A, B)

Freq. Range: DC, 1Hz to 300 MHz

Mode: Vmax, Vmin, Vp-p

Resolution: 2.5 mV

Uncertainty (5V range, typical):

DC, 1Hz to 1kHz: $1\% + 15$ mV

1kHz to 20 MHz: $3\% + 15$ mV

20 to 100 MHz: $10\% + 15$ mV

100 to 300 MHz: $30\% + 15$ mV

Aux parameters: Vmin, Vmax, Vp-p

Time Stamping A, B, C

Raw time stamp data together with pulse counts on inputs A, B or C, accessible via GPIB or USB only.

Max Sample Speed: See GPIB specifications

Max Frequency: 160 MHz

Timestamp Resolution: 70 ps

Power C

Range:

Power: -35 dBm to +10 dBm

Frequency: 300 MHz to 27, 40, 46 or 60 GHz

Display units: dBm (default) or W

Resolution: 0.01 dBm @100 ms measuring time

Accuracy (typ.): <1dBm to 27 GHz;

<2dBm to 40 GHz; <3dBm to 60 GHz

Acquisition:

Auto or Manual (within ± 40 MHz)

Acquisition time: 20 to 30 ms in Auto (typ.)

Aux. Parameters: Frequency C

Pulsed RF parameters (Option 28)

Pulse ON voltage range:

0.4 to 40 GHz: -15 dBm to +13 dBm

(-20 dBm typ. to +13 dBm)

40 to 46 GHz: -10 dBm (typ.) to +13 dBm

46 to 60 GHz: 0 dBm (typ.) to +10 dBm

Min ON/OFF ratio: 15 dB

Pulse Width

Range: 30 ns to 1 sec.

Resolution: 100 ps rms

Accuracy: <20 ns

PRI (pulse repetition interval)

Range: 60 ns to 1 sec. (from 50 ns typ.)

Resolution: 100 ps rms

Accuracy: <2 ns

PRF (pulse repetition frequency)

Range: 1 Hz to 16.7 MHz (20 MHz typ.)

Resolution: $(100\text{ps}/\text{Meas_time}) * \text{PRF Hz}$

Frequency in Burst

Range: 400 MHz to 60 GHz

Pulse width: down to 100 ns

Resolution: $(50\text{ps}/\sqrt{N}/\text{Gate_time}) * \text{FREQ Hz}^*$

Acquisition: Manual

Peak Power in Burst

Range: -15 to +13 dBm

Pulse width: down to 20 us

Acquisition: Manual

Resolution: 0.1 dBm

* N = number of RF pulses during total measurement

Input and Output Specifications

Inputs A and B

Frequency Range:

DC-Coupled: DC to 400 MHz

AC-Coupled: 10 Hz to 400 MHz

Impedance:

$1\text{M}\Omega$ // 20 pF or $50\ \Omega$ (VSWR $\leq 2:1$)

Trigger Slope: Positive or negative

Max. Channel Timing Difference: 500 ps

Sensitivity:

DC-200 MHz: 15 mVrms

200-300 MHz: 25 mVrms

300-400 MHz: 35 mVrms

Attenuation: x1, x10

Dynamic Range (x1):

30 mVp-p to 10 Vp-p within $\pm 5\text{V}$ window

Trigger Level: Read-Out on display

Resolution: 3mV

Uncertainty (x1): $\pm(15\text{ mV} + 1\%$ of trigger level)

AUTO Trigger Level: Automatically set to 50% point of input signal (10% and 90% for Rise/Fall Time)

AUTO Hysteresis:

Freq. range: 1Hz to 300 MHz

Time: Min hysteresis window (hysteresis compensation)

Frequency: 40% of input signal amplitude (typ.)

Analog LP Filter: Nominal 100 kHz, RC-type.

Digital LP Filter: 1Hz to 50 MHz cut-off frequency

Max Voltage Without Damage:

$1\text{M}\Omega$: 350 V (DC + AC pk) to 440 Hz, falling

to 12 Vrms at 1MHz; $50\ \Omega$: 12 Vrms

Connector: BNC

Input C

Freq. Range: 0.3 to 27, 40, 46, 60 GHz depending on model

Operating input voltage range:

0.3 to 18 GHz: -33 to +13 dBm

18 to 20 GHz: -29 to +13 dBm

20 to 27 GHz: -27 to +13 dBm

27 to 40 GHz: -23 to +13 dBm

40 to 46 GHz: -17 to +13 dBm

46 to 60 GHz: -15 to +10 dBm

Impedance: $50\ \Omega$ nominal, AC coupled

VSWR:

0.3 to 27 GHz: <2.0:1 (typ.)

27 to 46 GHz: <2.5:1 (typ.)

46 to 60 GHz: <3.0:1 (typ.)

FM tolerance:

Manual acq.: 50 MHz p-p; freq C >3.5 GHz

30 MHz p-p; freq C <3.5 GHz

Auto acq.: 20 MHz p-p; for any freq C and modulation frequency > 0.1 MHz

AM tolerance:

Any modulation index (minimum signal must be within sensitivity range)

Automatic Amplitude Discrimination:

10 dB separation between 2 signals within 30 MHz, 20 dB otherwise

Max Voltage Without Damage: +18 dBm

Overload indication:

ON when input C power >+10 dBm

Connector:

27 and 40 GHz: 2.92 mm sparkplug female

46 and 60 GHz: 1.85 mm sparkplug female

(all connectors are field replaceable)

Rear Panel Inputs and Outputs

Reference Input: 1, 5, or 10 MHz;

0.1 to 5Vrms sine; impedance $\geq 1\text{k}\Omega$

Reference Output:

10 MHz; >1Vrms sine into $50\ \Omega$

Arming Input:

Arming of all measuring functions

Impedance: Approx. $1\text{k}\Omega$

Freq. Range: DC to 80 MHz

Connector: BNC

Auxiliary Functions

Trigger Hold-Off

Time Delay Range:

20 ns to 2sec., 10 ns resolution

External Start and Stop Arming

Modes: Start and Stop Arming

Input Channels: A, B or E (Ext. Arming input)

Max Rep. Rate for Arming Signal:

Channel A, B: 160 MHz

Channel E: 80 MHz

Start Time Delay Range:

20 ns to 2sec., 10 ns resolution

Statistics

Functions: Maximum, Minimum, ΔMax-Min, Mean, Standard Deviation and Allan Deviation

Display: Numeric, histograms or trend plots

Sample Size: 2 to 2 x 10⁹ samples

Limit Qualifier: OFF or Capture values above/below/inside or outside limits

Measurement Pacing: 4μs to 500 sec.

Mathematics

Functions: (K*X+L)/M, (K/X+L)/M or X/M-1.

X is current reading and K, L and M are constants; set via keyboard or as frozen reference value (X₀)

Other Functions

Measuring Time: 20 ns to 1000 s for Frequency, Burst, PRF, Period Average and Power. Single cycle for other measuring functions

Timebase Reference:

Internal, External or Automatic

Display Hold: Freezes result, until a new measurement is initiated via Restart

Limit Alarm: Graphical indication on front panel and/or SRQ via GPIB

Limit Values: Lower limit, Upper limit

Settings: OFF or Alarm if value is above/below/inside or outside limits

On Alarm: STOP or CONTINUE

Display: Numeric + Graphic

Stored Instrument Set-ups: 20 instrument setups can be saved/recalled from internal non-volatile memory. 10 can be user protected.

Result Storage: Up to 8 measurements of max 32k samples can be stored in local memory for later downloading.

Display:

Backlit LCD Graphics screen for menu control, numerical read-out and status information

Number of Digits: 14 digits in numerical mode

Resolution: 320*97 pixels

GPIB Interface

Compatibility: IEEE 488.2-1987, SCPI 1999 or 53131A/53132A compatibility mode

Interface Functions:

SH1, AH1, T6, L4, SR1, RL1, DC1, DT1, E2

Max. Measurement Rate:

GPIB: 5k readings/s (block mode)

500 readings/s (individual GET trig'ed)

To Internal Memory: 250k readings/s

Internal Memory Size: Up to 750k readings.

USB Interface

USB Version: 2.0 Full speed (11 Mb/s)

Calibration

Mode: Closed case, menu controlled

Cal. Frequencies: 0.1, 1, 5, 10, 1.544 and 2.048 MHz

General Specifications

Environmental Data

Class: MIL-PRF-28800F, Class 3

Operating Temp: 0°C to +50°C

Storage Temp: -40°C to +71°C

Humidity: 5%-95% (10°C to 30°C)

5%-75% (30°C to 40°C)

5%-45% (40°C to 50°C)

Altitude: 4 600 m

Vibration: Random and sinusoidal according to MIL-PRF-28800F, Class 3

Shock: Half-sine 30G per MIL-PRF-28800F Bench handling

Transit drop test:

According to MIL-PRF-28800F

Safety: EN 61010-1, pollution degree 2, meas cat I, CSA C22.2 No 1010-1, CE

EMC: EN 61326 (1997); A1 (1998), increased test levels according to EN 50082-2, Group 1, Class B, CE

Mains power: 90 to 265 Vrms, 45 to 440 Hz, <40 W, <60 W if battery option

Dimensions and Weight

Width x Height x Depth:

210x90x395 mm (8.25x3.6x15.6 in)

Weight: Net 2.7 kg (5.8 lb),

Shipping app. 3.5 kg (app. 7.5 lb)

Ordering Information

Basic Models

CNT-90XL-27G:

27 GHz Microwave Counter/Analyzer

CNT-90XL-40G:

40 GHz Microwave Counter/Analyzer

CNT-90XL-46G:

46 GHz Microwave Counter/Analyzer

CNT-90XL-60G:

60 GHz Microwave Counter/Analyzer

Time Base: Medium Stability Oven Time Base; 0.06 ppm/month as standard

Time Base Options

Option Model:	Standard	30/90	40/90
Time base type:	OCXO	OCXO	OCXO
Uncertainty due to:			
- Aging: per 24 h	<5x10 ⁻⁹ (1)	<5x10 ⁻¹⁰ (1)	<3x10 ⁻¹⁰ (1)
per month	<6x10 ⁻⁸	<1x10 ⁻⁸	<3x10 ⁻⁹
per year	<2x10 ⁻⁷	<5x10 ⁻⁸	<1.5x10 ⁻⁸
- Temperature variation: 0°C to 50°C	<5x10 ⁻⁸	<5x10 ⁻⁹	<2.5x10 ⁻⁹
20°C to 26°C (typ. values)	<2x10 ⁻⁸	<1x10 ⁻⁹	<4x10 ⁻¹⁰
Short term stability: τ = 1 s	<1x10 ⁻¹⁰	<1x10 ⁻¹¹	<5x10 ⁻¹²
(root Allan Variance) τ = 10 s	<1x10 ⁻¹⁰	<1x10 ⁻¹¹	<5x10 ⁻¹²
Power-on stability			
Deviation vs final value after 24 h on time,	<1x10 ⁻⁷	<1x10 ⁻⁸	<5x10 ⁻⁹
after a warm-up time of:	30 min	10 min	10 min
Typical total uncertainty, for operating temperature			
20°C to 26°C, at 2σ (95%) confidence interval:			
- 1 year after calibration	<2.4x10 ⁻⁷	<0.6x10 ⁻⁷	<1.8x10 ⁻⁸
- 2 years after calibration	<4.6x10 ⁻⁷	<1.2x10 ⁻⁷	<3.5x10 ⁻⁸

(1) After 1 month of continuous operation

Included with Instrument: 3 years product warranty¹, line cord, user documentation on CD, and Certificate of Calibration

¹The warranty period may be dependent on country.

Pulsed RF Option

Option 28: Pulsed RF measurements

Time Base Options

Option 30/90: Very High Stability Oven Time Base; 0.01 ppm/month

Option 40/90: Ultra High Stability Oven Time Base; 0.003 ppm/month

Option 23/90 Battery Unit

Battery Type: Li-Ion, 90 Wh

External DC input: 10 to 18 Vdc; max 6A

Operating temp. range: 0°C to 40°C

Storage: -20°C to +60°C, 1 month

-20°C to +45°C, 3 months

-20°C to +20°C, 1 year

Battery operating time (at 25°C):

ON: >4.5 hours

Stand-by: >24 hours

Charging:

Automatically when AC or ext DC is connected

Battery status indicator:

On-screen with Low battery warning

Weight: 2.3 kg (4.9 lb)

Optional Accessories

Option 22/90: Rack-Mount Kit

Option 27: Carrying Case - soft

Option 27H: Heavy-duty Hard Transport Case

Option 29/90: TimeView Modulation Domain Analysis SW for CNT-90XL

Option 90/06: Calibration Certificate with Protocol; Oven oscillator

Option 90/00: Calibration Certificate with Protocol; Frequency aging/week

Option 95/05: Extended warranty from 3 to 5 years

OM-90: Users Manual English (printed)

PM-90: Programmers Manual English (printed)

SM-90: Service Manual English

GS-90-EN: Getting Started English

GS-90-FR: Getting Started French

GS-90-DE: Getting Started German