

# Path Align-R™

## Accessories Catalog



Waveguide Adaptor Acc 330



Waveguide-to-Coax Adaptor  
WR-137 to N (f)  
(5.8-8.20 GHz)

Flange: CPR137F  
(8) Through holes  
No choke or gasket grooves  
Rectangular flange

Waveguide Adaptor Acc 331



Waveguide-to-Coax Adaptor  
WR-90 to N (f)  
(8.20-12.40 GHz)

Flange: UBR100  
(4) Through holes  
No choke or gasket grooves  
Square flange

Waveguide Adaptor Acc 332



Waveguide-to-Coax Adaptor  
WR-112 to N (f)  
(7.05-10.0 GHz)

Flange: CPRF 112  
(8) Through holes  
No choke or gasket grooves  
Rectangular flange

Waveguide Adaptor Acc 333



Waveguide-to-Coax Adaptor  
WR-42 to SMA (f)  
(18.00-26.50 GHz)

Flange: UBR220  
(4) Through holes  
No choke or gasket grooves  
Square flange

Waveguide Adaptor Acc 334



Waveguide-to-Coax Adaptor  
WR-75 to N-type (f)  
(10.0-15.0 GHz)

(4) Through holes  
No choke or gasket grooves  
Square flange

Waveguide Adapter Acc 348



Waveguide-to-Coax Adaptor  
WR-137 to N (f)  
(5.85-8.20 GHz)

(6) Through holes  
No choke or gasket grooves  
Round flange

Waveguide Adapter Acc 349



Waveguide-to-Coax Adaptor  
WR-90 to N (f)  
(8.20-12.4 GHz)

(8) Through holes  
No choke or gasket grooves  
Rectangular flange

Ceragon Adaptors



Waveguide-to-Coax SMA Adaptors  
Acc 351 Ceragon ODU 11GHz  
Acc 358 Ceragon ODU 18GHz  
Acc 353 Ceragon ODU 23 GHz

Dragonwave Adaptors



Waveguide-to-Coax SMA Adaptors  
Acc 361 Dragonwave ODU 11GHz  
Acc 368 Dragonwave ODU 18GHz  
Acc 363 Dragonwave ODU 23 GHz

Path Align-R Backpack Acc 336



Weather-resistant instrument backpack

Coax Cable Acc 324



Coax Cable  
SMA (m) (right-angle) to SMA (m)  
Length: 3 meters

Coax Cable Acc 329



Coax Cable  
SMA (m) to N (m)  
Length: 6 feet

Coax Adaptor Acc 325



Coax Cable Adaptor  
SMA (f) to N (m)

Ruggedized Coax Cable Acc 338



Ruggedized Coax Cable  
 Low-loss (less than -2dB to 20 GHz)  
 SMA (m) to N (m)  
 Length: 72 inches

RS-232 Cable Assy Acc 340



RS-232 Cable Assy  
 DB-9 (m) to DB-9 (f)  
 Length: 6 feet

USB Cable Assy Acc 341



USB Cable Assy  
 USB "A" (m) to USB "B" (m)  
 Length: 6 feet

Spare Battery Acc 320



Spare Battery  
 12 V, 2.3 Ah Rechargeable Sealed  
 Lead/Acid Battery

Battery Charger Acc 321



Portable Battery Charger  
90-264 VAC Mains with Adaptor

Cold Battery Pack Acc 400



Cold Battery Pack  
External battery pack to extend battery life in cold-weather conditions

Vehicle Adaptor Acc 323



In-vehicle battery charger with battery clip for charging spare battery (outside instrument)


Headset Acc 327



Headset (earpiece with microphone) and clothing clip

Single Instrument Hard Case Acc 326  
 Hard Case—Holds a single Path Align-R instrument

Watertight up to 30 feet  
 Corrosion-proof, dust-proof, crush-proof  
 Exceeds the highest standards of industrial, airline, military and commercial applications—even in extreme temperatures under the most hazardous transportation, handling and site conditions.

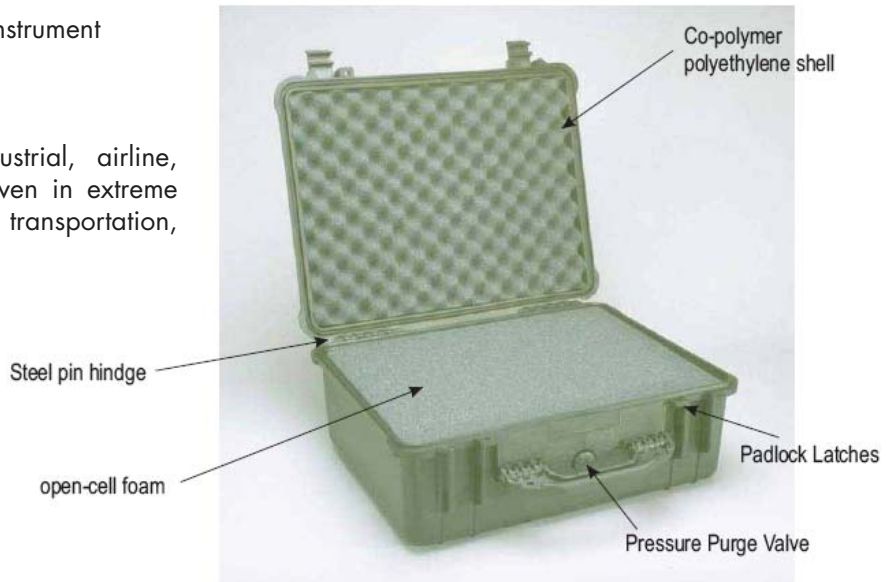

Hard Case For Instrument Set Acc 339  
 Case with wheels for Path Align-R set (holds 2 units)



Unbreakable, watertight, dust-proof. chemical resistant and corrosion-proof. These cases are made of Ultra High Impact structural copolymer and are extremely strong and durable. Their exclusive 1/4" (6.4 mm) neoprene o-ring and ABS latches seal perfectly and include an automatic purge valve for quick equalization after changes in atmospheric pressure. Equipment fits into high density foam for protection against impact, vibration or shock. These cases are NATO codified and tested to MIL C-4150J (Military Standard), IP-67 (Ingress Protection) and ATA (Air Transportation Association). These cases have a lifetime guarantee against breakage or defects in workmanship but, the guarantee does not cover sharkbite, bear attack or children under 5.