

GNSSource™-2500

Smart GPS/GNSS & Low-Noise Rubidium Reference Source
 SmarTiming+® 1ns-Resolution Disciplining Technology Inside


The GNSSource is a low-cost, high-performance GPS/GNSS primary reference source. It integrates a smart, low-noise Rubidium LNRClok-1500 and a GPS/GNSS receiver. It uses the GPS/GNSS SmarTiming+® technology, disciplining the Rb LNRClok with an auto-adaptive loop time constant of 1,000 to 100,000 seconds, depending on the GPS/GNSS signal quality, at cutting-edge 1ns resolution. It's designed for cross-industry applications, where high stability and timekeeping features is a driving requirement.



KEY FEATURES

- Integrated GPS/GNSS receiver & low-noise Rb LNRClok
- Integrated GPS/GNSS disciplinable Rb LNRClok function, using SmarTiming+® technology at 1ns resolution
- Output Frequencies (8x 10MHz / 8x 1PPS or 16x 10 MHz)
- Integrated smart auto calibration
- Internal Bit Alarm
- RS232 standard interface (9600 b/s)
- Windows 7, XP software application
- GPS antenna types (patch or rooftop)
- Power supply voltage (AC input 100-240 VAC / 50-60Hz)
- Compact 1U rack mountable chassis

Typical Short Term Stability

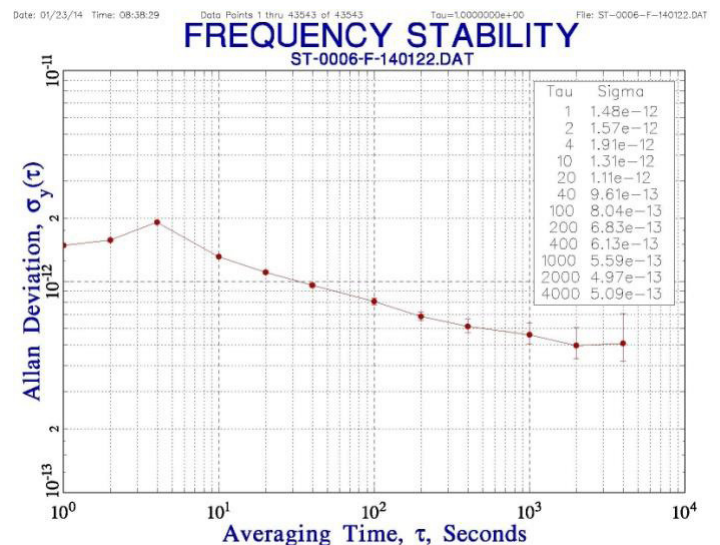

Applications

Synchronization | Timing | Reference/Test Source | Time/Frequency Source

SPECIFICATIONS

ELECTRICAL

Spec	GNSSource-2500	
Reference module	Standard	Options
RFOUT Frequency	10MHz	10.23MHz
Number of Output	8x backplane 1x faceplate	(ordering code: 10.23M) 16x backplane 1x faceplate (ordering code: 16RF)
PPSOUT	1PPS	1PPS
Functionality	See SMARTIMING+	See SMARTIMING+
Number of Output	8x backplane 1x faceplate	(ordering code: 16RF) 1x faceplate (ordering code: S)
Short Term Stability		(ordering code: S)
1s	2E-11	3E-12
10s	6E-12	3E-12
100s	2E-12	1E-12
Phase Noise (dBc/Hz)		(ordering code: LN) (ordering code: ULN)
(RFOUT: 10 MHz)	-90	-100
1Hz	-110	-126
10Hz	-135	-145
100Hz	-145	-155
1kHz 10kHz	-150	-155
		*: subject to export control
Aging (Measured after 3 months of continuous operation)		< 5E-11 / month (typical: 3E-11 / month)
Frequency Retrace		< 5E-11 24 hr / 1 hr
Off/On (In stable temperature, gravity, pressure and agnetic field conditions)		
RFOUT Levels		
Output		Sine wave, 0.5 Vrms (±10% / 50 Ω), 1x faceplate **Sine wave, 1.0 Vrms (±10% / 50 Ω), 8x backplane (** ordering code: 16RF 16x)
Impedance		50 Ω ±20% < -25dBc < -80dBc
Harmonics Spurious f0 ± 100kHz (SYNTH Off)		
GPS Antenna Connector		SMA

SMARTIMING+® FUNCTIONALITY

Spec	GNSSource-2500	
Disciplining module	Standard	
PPSOUT	1PPS	
Output level	CMOS 0-5V (+- 20 mA sink/source)	User settable, 0 to 1s in 133ns/step
Pulse width (PW) or duty cycle		
PPSOUT to PPSREF	Sync Error	< 50 ns
In Sync mode		No GPS PPSRef noise, ± 1°C temp fluctuations
PPSOUT to PPSREF (DE)		
Programmable delay (in Track mode)		0 to 1 s in 66 ns steps
PPSOUT Holdover Time Stability		Within ± 2°C 1 µs/24 hr
Smart Loop Time Constant	Auto-adaptive 1000 to 100,000 sec	User settable
Phase/Frequency User settable	Sync/Track mode	** Selected by RS232 interface ** Sync: phase/time alignment; Track: frequency alignment

GPS / GNSS ANTENNA

Spec	GNSSource-2500	
	Standard	(Option code GPS) : using LEA-6T receiver (Option code GNSS) : using LEA-M8T receiver allowing Beidou , Galileo etc...
Antenna Types		(ordering code: RA) Rooftop antenna kit Included
Lightning Surge Protector	Patch antenna kit	(ordering code: CA)
Cable Length	Not applicable	5+15m / 16.4' + 49'
Antenna mounting bracket	Not applicable	(ordering code: BRA)

POWER

Spec	GNSSource-2500	
	Standard	
Power Supply	AC input 100-240 VAC	
Power Input Fluctuation	±10% of nominal supply voltage (230V~)	
Input Frequency	50 – 60 HZ	
Power Consumption @25°C	< 25W after warm-up	
Current	1.5 – 0.65A	
Connector Type	IEC plug	

ENVIRONMENT

Spec	GNSSource-2500	
	Standard	
Operating Temperature	0 to 40°C	
		(Relative humidity: 10-85%)
Storage	-25 to 55°C	
Transportation	-25 to 70°C	
Max Altitude	10'000 Ft	

PHYSICAL

Spec	GNSSource-2500	
	Standard	Option
Size	445 x 300 x 44 mm (1U) / 17.52 x 11.81 x 1.73 in.	
Weight	4 kg / 8.82 lbs	
Mounting	Tabletop feet	19" rack mountable ears (ordering code: E)

SYSTEM SUPPLY

Type	GNSSource-2500	
1x	GNSSource-2500	
1x	GPS patch antenna kit (with option code RA : Rooftop antenna kit)	
1x	Cables SUB-D male/female for PC serial COM	
2x	19" rack mountable ears or tabletop feet (option E)	
1x	iSyncMgr application, user manual & spec	
1x	Euro Power Cable	US Power Cable (ordering code: US) China Power Cable (ordering code: CN) Swiss Power Cable (ordering code: CH) Indian Power Cable (ordering code: IN)
Standard		


SOFTWARE UPGRADES

GNSSource-2500	
Download the latest software upgrades at www.oralia.com	


ORDERING INSTRUCTIONS GNSSource-2500 / XX / YY /

Type Option 1 Option 2

MECHANICAL LAYOUT

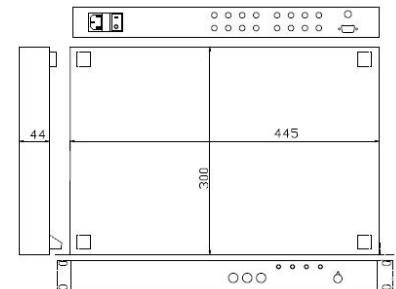

I/O INTERFACES



Back Panel

N°	Type	Definition	I/O
J1	SMA	GPS antenna connection	I
J2	SUB-D9-F	Serial communication RS232 Pin 2 TxD / Pin 3 RxD / Pin 5 GND	I/O
J3- J10	SMA	8x 10MHz sine reference outputs	O
J11-J18	SMA	8x 1PPS outputs (16x 10 MHz sine reference outputs with option code 16RF)	O
J19	IEC PLUG	Power connection	I
S1	SWITCH	On/Off switch	-
F1	FUSE	Primary power Supply fuse T3.15A	-

Front Panel

N°	Type	Definition	I/O
J20	BNC	10MHz sine reference output	O
J21	BNC	1PPS output	O
I3	Green LED	Power indicator	-
I4	Green LED	Sync or Track mode enabled	-
I5	Red LED	Rubidium clock locked alarm	-
I6	Green LED	1PPS GPS applied	-
S2	SWITCH	Free run, Sync or track selection switch	-